




StreamLine[®]

MODULAR SERIES

DOCK BASES



SIGNALS

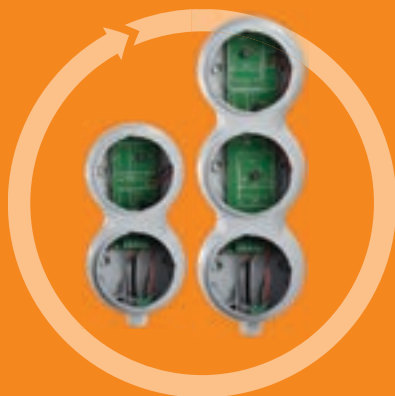

BASES



SIGNALS & BASES


*Top modules are sold separately from Dock Base. Each base comes standard with visors.



SLMB2 and SLMB3

The StreamLine® Dock Light Base option is ideal for indoor or outdoor applications in high foot traffic areas including parking garages, factories, and loading docks.

Models SLMB2, 2-stack dock light, and SLMB3, 3-stack dock light, allow for one function per position. Each base comes standard to surface mount with visors included. Optional wall (SLMB23W) and 1/2" NPT pipe (SLMB23N) mounting options are sold separately. If additional side visibility is needed, the visors can be replaced with retaining rings (SLM-RR).

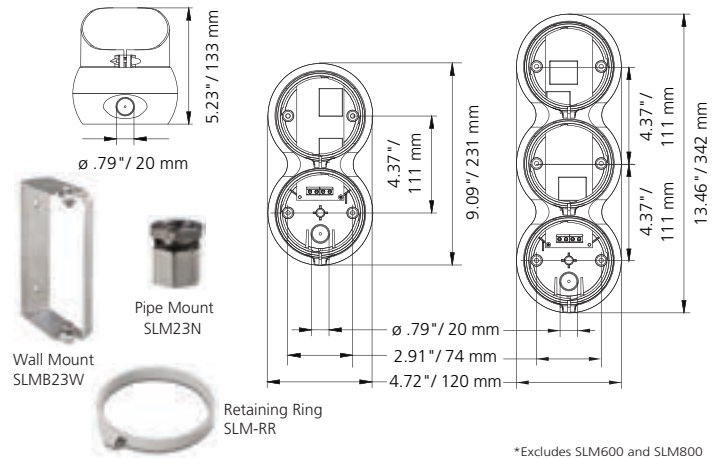

*Excludes SLM600 and SLM800

SLM100

A B C G R



SLM100 is available in five colors and offers three separate light effects (steady, flashing or rotating), controllable via independent electric contacts.

SLM200

A B C G R



SLM200 is available in five colors and offers three separate light effects (flashing, simulated strobe or random), controllable via independent electric contacts.

SLM300 and SLM350

A B C G R



SLM300 (proximity) and SLM350 (long-distance) low-profile signals are available in five colors and offer three different light effects (steady, flashing, strobe), controllable via independent electric contacts.

SLM1400 and SLM1450

A B C CY G M R Y



SLM1400 (proximity) SLM1450 (long-distance) low-profile signals allow for three levels of alarm. For each channel, eight different colors and five light effects (steady, 1x flash, 2x flash, 4x flash and random) can be selected.

SLM500

A B C G R



SLM500 is an audible/visual LED beacon and sounder that allows three separate levels of alarm (alert, pre-alarm, alarm) controllable via independent electric contacts. SLM500 offers two light effects (steady or flashing) and 64 different tones (selectable via dip-switch) through two inputs, adjustable between 65 dB(A) and 105 dB(A).

SLM700

GY R



Multifunctional electronic sounder allows two separate levels of alarm (pre-alarm, alarm) controllable via independent electric contacts. SLM700 offers 64 different tones through two separate inputs, adjustable between 65 dB(A) and 105 dB(A).

Note: IP and NEMA ratings are dependent on top audible or visual signaling devices selected. See individual product data sheets for more information.