



Light Columns

LED Light Columns



Watts 18W, 30W, 60W other wattages available

Height 8ft, 10ft, 12ft
Other Sizes Available

Mounting Direct Burial, Surface Mount

Diameter 6" Standard, Custom Sizes Available

Voltage 120-277V, 347V

Cut-Off Shields 180° House Side Cut Off,
Custom Decorative Inserts Available

Laser Etching/
Engraving Company Logos

Laser Cut Laser Cut Patterns/Logos

Finish Sandtex Black, Dove Grey (standard)
Custom Colours Available

Colour Temperature 3K/4K/5K Standard

LED Colours Custom LED Colours Optional
(red, green, blue)

Dimming 0-10V Dimming
Other Options Available

Lens White

Distribution Type 5 (standard)

Options GFCI outlets (120V only) , EV Charging
Stations,
Courtesy USB charging,

Surge Suppression Standard 6kv
Optional 10kv

DESCRIPTION

LED Light Columns are fully customizable for a variety of looks and features to meet your desired function.

APPLICATIONS



Parking Lots



Condos



Parks



Office
Complexes

FEATURES

- Shafts are made of 6" extruded aluminum .125" wall thickness
- Surface mount units have four 3/4" diameter galvanized anchor bolts with a 9 1/2" bcd, two piece aluminum base cover included
- Lens is made of acrylic 6" diameter with a white finish to provide a soft even distribution type v
- Hand hole opening provided as standard

CUSTOM OPTIONS



Standard Colors

 bronze 195632 / GSS12M17	 matte black 103848 / 39/60020	 black sandtex (textured) 194288 / P-2128-LT	 mirror black (shiny) 103849 / P-177-9	 white 103847 / P-177-9	 dove grey 000047 / SCP-409	 blue 103865 / SCP-810
 red 103866 / P-6015-8	 yellow 195585 / RAL 1018 (TIGER)	 green 103884 / SCP-651	 garden green 194070 / TD01032-F-FILE#11696			

Metallic Colours

 hammerstone 194290 / TGIC DCL#5980-0799-MMI	 sparkle silver 194280 / PM211511
--	--

Custom Colours



CUSTOM FINISHES






LASER CUT LOGOS



LASER CUT PATTERNS

(Please allow for longer lead times, pattern will be reviewed before confirmation)

CUSTOM OPTIONS

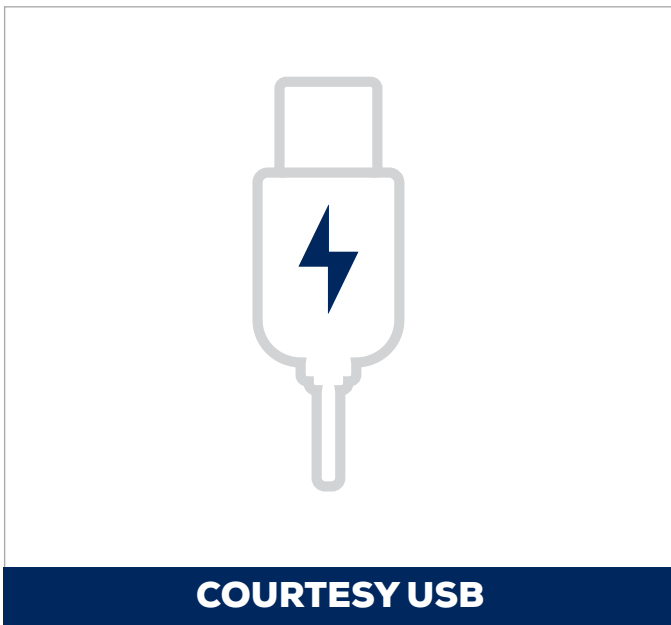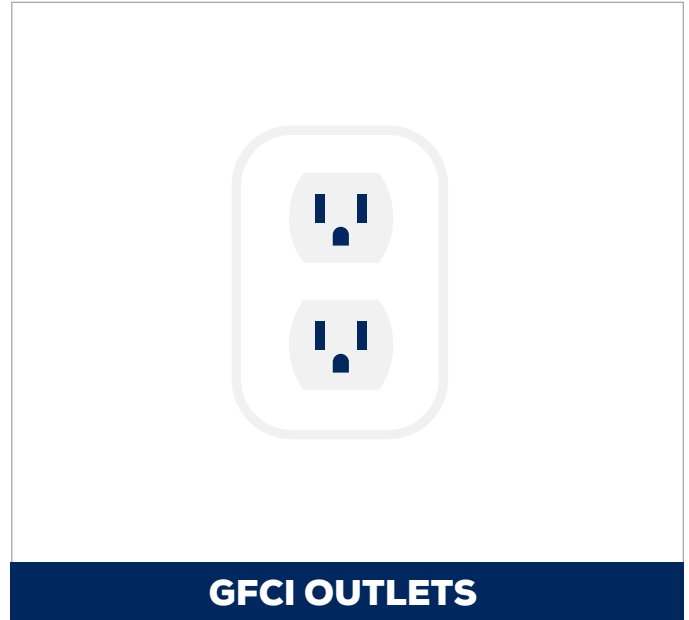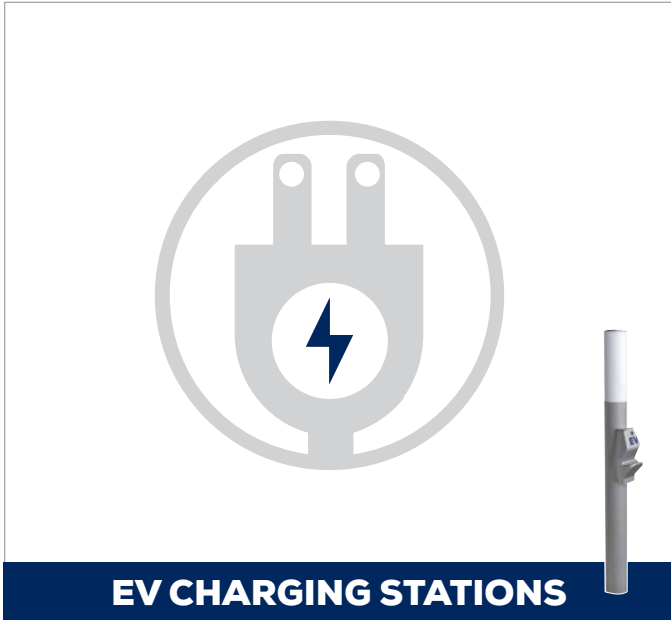


MOUNTING



DIMENSIONS


DIRECT BURIAL

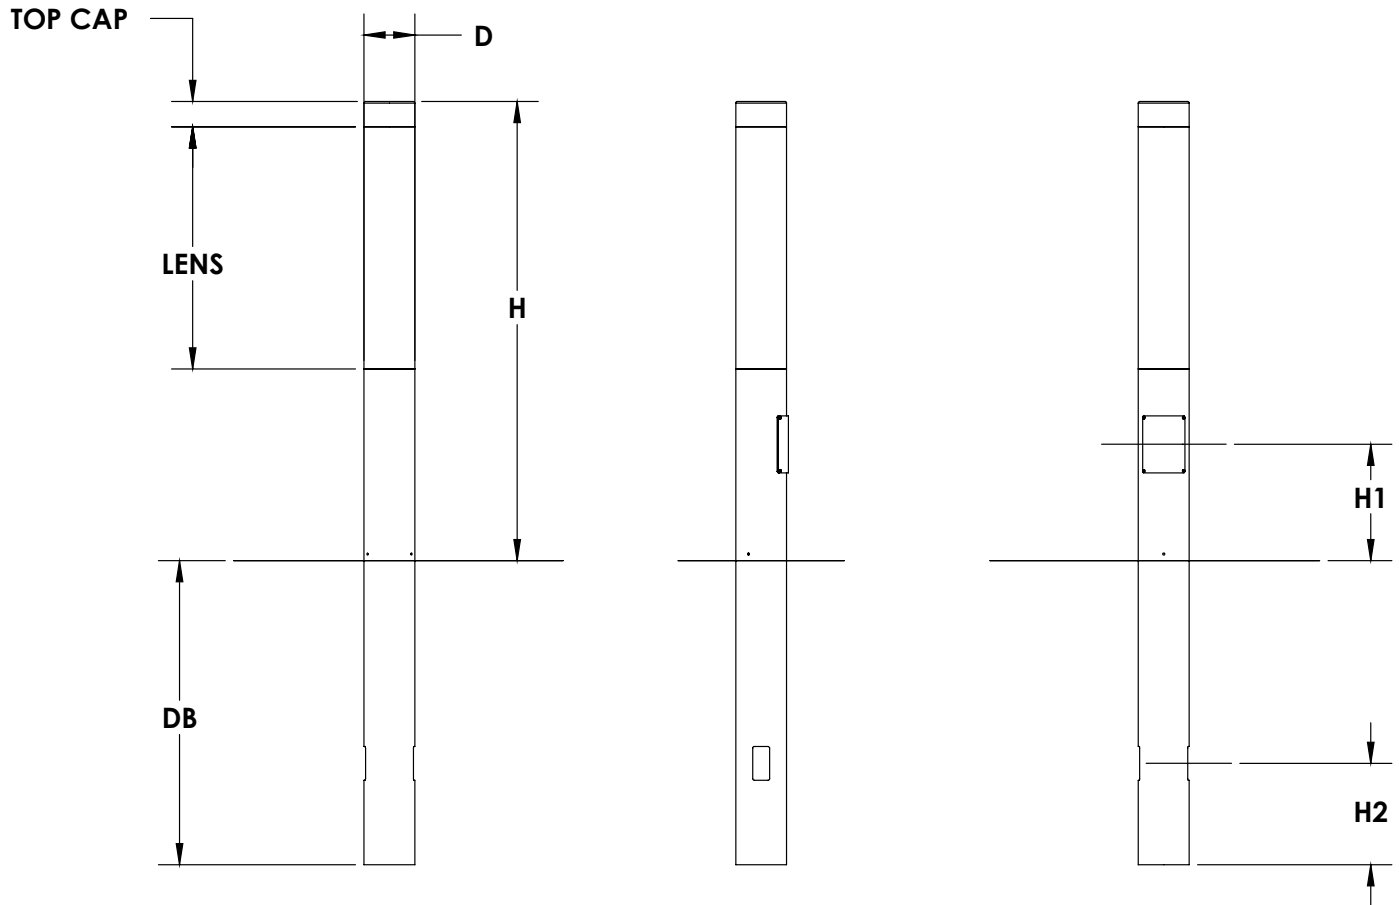

- D - COLUMN DIAMETER
- DB - DIRECT BURIAL - LENGTH UNDER GROUND
- H - HEIGHT ABOVE GROUND
- H1 - HEIGHT FROM GROUND LEVEL TO CENTER OF HAND HOLE
- H2 - HEIGHT FROM BOTTOM OF ALUMINUM TUBE TO LINE CABLES' OPENINGS

DIMENSIONS

SURFACE MOUNT

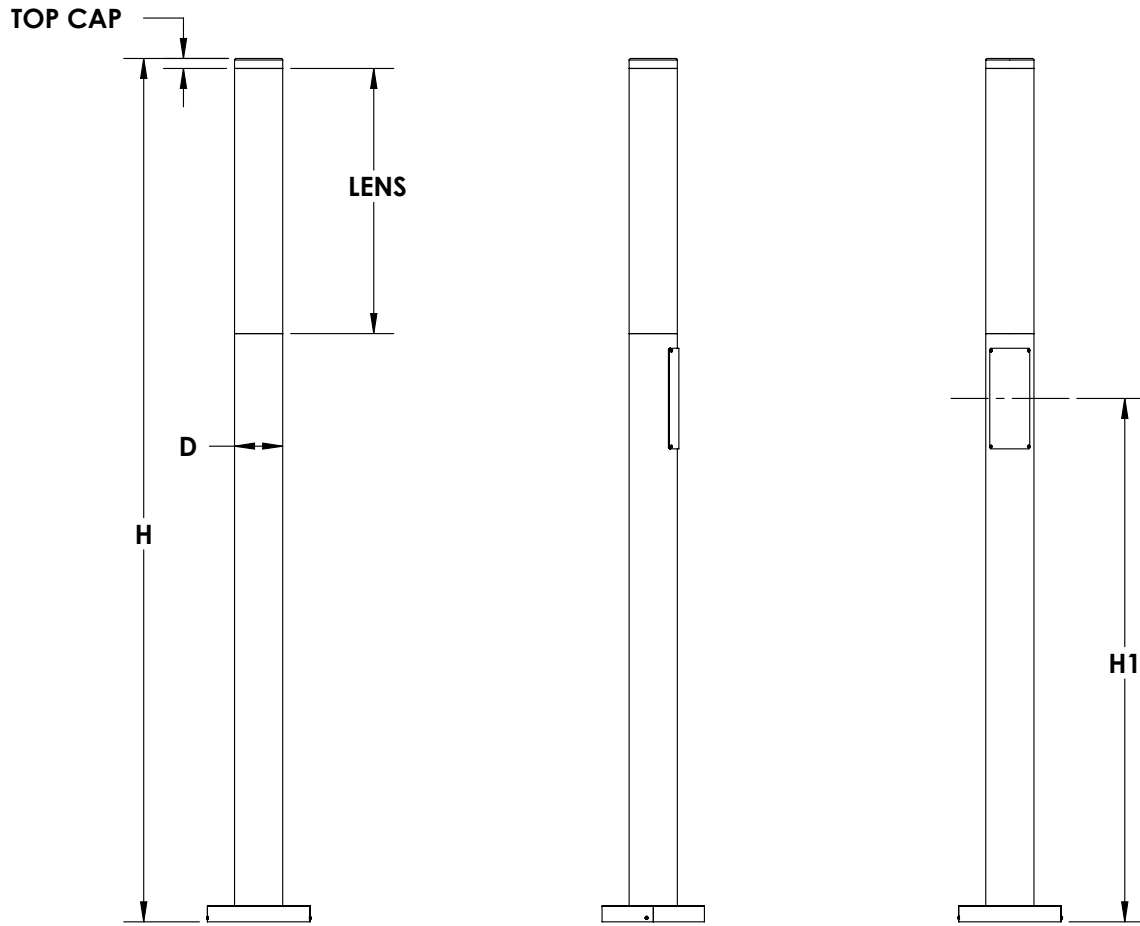

D - COLUMN DIAMETER
H - TOTAL HEIGHT FROM GROUND LEVEL
H1 - HEIGHT TO CENTER OF HAND HOLE

ORDERING GUIDE

LC						
	WATTS	VOLTAGE	COLOUR TEMP.	FINISH	MOUNTING	DIM
	LED18	B - 120 - 277V*	3K - 3000K	SANDEXTX BLACK	Direct Burial	0-10V Dimming
	LED30	C - 347V	4K - 4000K*	DOVE GREY	Surface Mount	
	LED60		5K - 5000K	CC - Custom		

* Standard

CUSTOM OPTIONS




LASER CUT LOGO



LASER CUT DESIGN
(Please allow for longer lead times, pattern will be reviewed before confirmation)



GFCI OUTLET



EV CHARGING STATION



COURTESY USB CHARGING