



RAB[®]
DESIGN

WPF/WPS- LED Architectural Wall Packs

2021

DESCRIPTION

LEGANTLY DESIGNED, EASY TO INSTALL, ENTIRELY SELECTABLE

Architectural wall packs in a sleek, modern design ideal for perimeter lighting in schools, condominiums, shopping malls, and commercial applications.





KEY FEATURES

- Available in full-cut off or semi-cut off versions
- Colour selectable and lumen selectable.
- Easy installation and secure wall mounting.
- Die-cast Aluminum housing.
- 0-10V dimming is standard.
- Built with wires for photocells and sensors installation.
- 8W, 90 min Emergency Battery Backup, 20W Battery Back Up and 20W Cold Pack Battery Back Up.**

** AVAILABLE IN SIZE 2 ONLY

FULL CUT OFF (WPF-LED)


Full cutoff light fixture, a luminaire designed and installed in such a manner that all light emitted from the luminaire, indirectly by reflection or refraction from any part of the fixture, is protected below the horizontal plane through the fixture's lowest light emitting part. Often used where light trespass is an issue.

*Only available in clear polycarbonate lens

SEMI CUT OFF (WPS-LED)

Semi cutoff wall pack is often used for a broad street and entryways or walkways, It is designed to **direct light forward throw**, much more further than LED full cutoff wall pack as a perimeter lighting. You can see that these wall pack fixture is often installed a little higher on the outside wall in order to illuminate to far distance.

*Only available in frosted polycarbonate lens

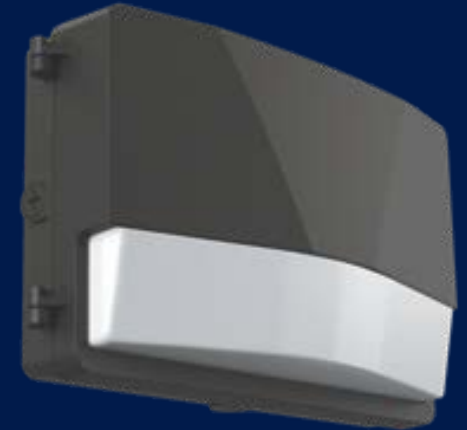

SPECIFICATIONS

| | WPF1 LED25A15 | WPF2 LED55A33 |
|--------------------|---|------------------|
| WATTS (W) | 24 (max) | 52.6 (max) |
| LUMENS (Lm) | 3397.9 (max) | 7560 (max) |
| EFFICACY (LM/W) | 142.9 | 144.5 |
| VOLTAGE | 120-347V, 120-277V (For PC, DMS, SMS only) 347V (For PC, DMS, SMS only) | |
| CCT | VK - Colour Selectable (3000K/4000K/5000K) | |
| DIMMING | 0-10V Dimming (Range 10%-100%)* | |
| FINISH | Bronze, Custom Colour | |

SPECIFICATIONS

| | WPS1 LED30A18 | WPS2 LED70A42 |
|--------------------|---|------------------|
| WATTS (W) | 29.8 (max) | 64.4 (max) |
| LUMENS (Lm) | 4341.7 (max) | 8847.2 (max) |
| EFFICACY (LM/W) | 145.7 | 137.2 |
| VOLTAGE | 120-347V, 120-277V (For PC, DMS, SMS only) 347V (For PC, DMS, SMS only) | |
| CCT | VK - Colour Selectable (3000K/4000K/5000K) | |
| DIMMING | 0-10V Dimming (Range 10%-100%)* | |
| FINISH | Bronze, Custom Colour | |

CERTIFICATIONS

